


EN **Installation instructions**



Product Specification

- TYPE FLX-PIHN-Z2
- OUTPUT MAX 1.5A
- OUTPUT SIGNAL 1-10V
- INPUT AC 120V~277V
- INPUT SIGNAL ZIGBEE 2.4GHz

Designation and Connection method

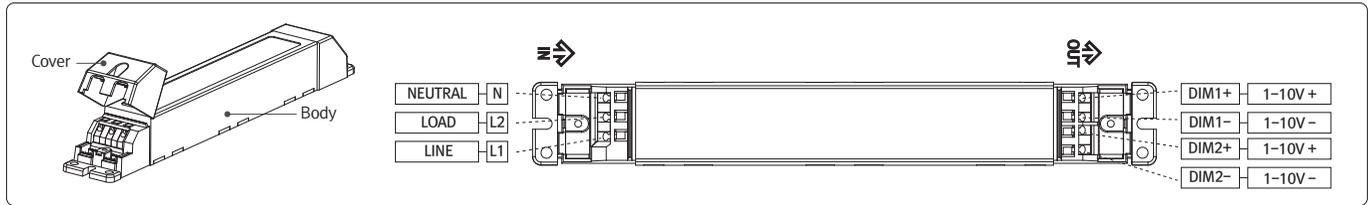

Installation

1 Connect ZIGBEE INTERFACE L1 to LINE (AC) and N to NEUTRAL (AC)

2 Connect AC LED lighting LINE (AC) to ZIGBEE INTERFACE L2, AC LED lighting LOAD (AC) to ZIGBEE INTERFACE N

3 Connect 1CH 1-10V(+) to ZIGBEE INTERFACE output DIM1+, Connect 1CH 1-10V(-) to DIM1-, 2CH 1-10V(+) to DIM2+ Connection, connect 2CH 1-10V(-) to DIM2-

4 Close the cover on both sides and secure the cover with the screw

5

① The reset button for 3 seconds to reset the interface.

② OFF-2CH, ON-1CH(Simultaneous operation)

Safety Precaution

- ! Risk of Electric Shock – More than one disconnect switch may be required to de-energize the device before servicing.
- ! Do not connect over Max. 1.5A
- ! Do not touch with wet hand. There is a chance of electric shock.
- ! Do not install this product close to flammables or heaters.
- ! Do not install at wet place. There is a chance of electric shock.
- ! Pull out the power cord in case of smoke or strange smell
- ! For supply connections, use 18 AWG or larger wires rated for at least 75°C.
- ! Use Copper Conductors Only
- ! TYPE 1 ENCLOSURE
- ! INDOOR USE ONLY
- ! Do not disassemble or remodel this product

Product warranty

One-year warranty, with one-to-one free replacement after inspection. (excluding breakage due to transportation & mis-handling)