


INSTRUCTION



SPECIFICATION

MODEL NAME	FDA-L5M	INPUT SIGNAL	DMX512
RATED INPUT	DC 12V/24V, Max.10A	OUTPUT SIGNAL	PWM DC 12V/24V, 5CH
RATED OUTPUT	DC 12V/24V, Max.2A/CH	CONNECTION	DC 12V/24V LED LAMP

COMPONENTS and WIRING

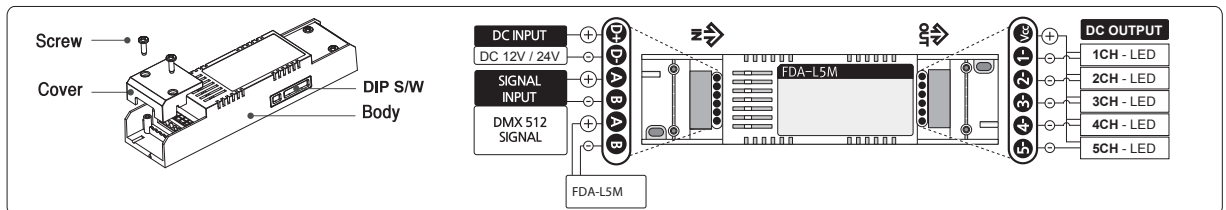

INSTALLATION

1 Open the side covers with proper tools

2 Following the wiring diagram, connect each wires to input/output terminals

CAUTION
make sure each input/output is connected to corresponding terminals

3 Arrange wires into the center and assemble the cover

CAUTION
make sure wires are not pressed by covers

4 Adjust settings using the dip switch on the side

CAUTION
Power should be applied after completing all settings

DIP S/W SETTING INSTRUCTION

DMX MODE

Working when you set up the address 1-511

EDIT S/W			DMX START ADDRESS S/W									
ON	ON	ON	ON	ON	ON	ON	ON	ON	ON			
1	2	3	1	2	4	8	16	32	64	128	256	SP

DIMMING SPEED
OFF - Instant dimming
ON - Smooth dimming

OFF - LED off at No signal
ON - LED on at No signal

OFF - 5 channel
ON - 1 channel (working same time)

Address Setting

DIP S/W 1- Address 1
DIP S/W 2- Address 2
DIP S/W 3- Address 4
DIP S/W 4- Address 8
DIP S/W 5- Address 16
DIP S/W 6- Address 32
DIP S/W 7- Address 64
DIP S/W 8- Address 128
DIP S/W 9- Address 256
DIP S/W 10 - Terminating Resistance On/Off

* Working Test mode when you set up the address 0
* When EDIT 1 time, S/W 2 times on/off in 5 seconds, Indicator LED is ON/OFF

SAFETY PRECAUTION

1. Disconnect all power sources before installation
2. Do not connect more than 2A per channel and total 10A
3. Do not touch with wet hand. There is a chance of electric shock
4. Do not install this product close to flammables
5. Do not install this product in humid place or exposed area
6. Turn off the power immediately in case of smoke or strange odor
7. Do not force to pull off fixed wires
8. Do not convert and impact product. It causes breakdown or electric shock

WARRANTY

Manufacturing defect and faulty occurs in normal use with the warranty period, product can be repaired at no charge by Feelux customer support.
Warranty period : one year after the purchase